




RESOLVER

- 4 S1 sin+ (red)
- 8 S3 sin- (black)
- 3 S4 cos+ (blue)
- 7 S2 cos- (yellow)
- 5 R2 ref+ (bl/wh)
- 9 R1 ref- (rd/wh)
- 2 Thermo +
- 6 Thermo -

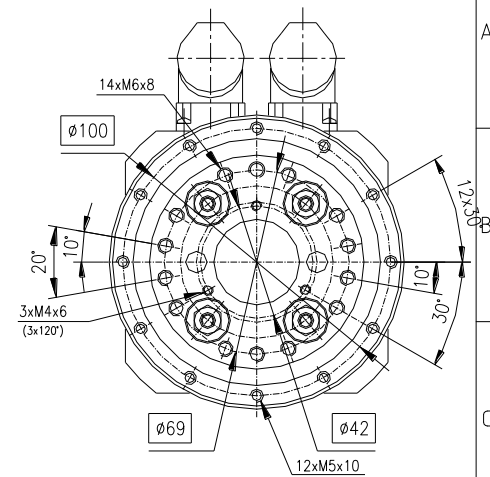

POWER

- 1 U (white)
- 4 V (blue)
- 3 W (red)
- 2 GND (gn/ye)
- C Brake+ (red)
- D Brake- (blue)

signal 12 pole elbow connector, view from the pins side to the elbow connector
P/N: A EW D 052 MR83 00 0014 000

elbow 8 pole connector
P/N: B EW D 089 MR13 00 0007 000
max. continuous current 20 Amps

Version	Änderung / Modification Description	Dwg. No.	
		V36165 SERVO-DRIVE.CZ	HG110
	Die oben genannten Bezeichnungen sind Richtwerte. Alle Abmessungen in mm / All dimensions in mm		Date : 22.03.2022 Version : 1.0 Author : P. UHER Update : xxxxxxxx